



ريليل هيتيرز اند الكترلكالس (م.م.ذ.)


RELIABLE HEATERS & ELECTRICALS(F.Z.C)



High-tech since 1931.

Energy Regulators:

E.G.O Energy Regulators Simmerstat are electrical control device that turns a heating element such as a stove, hotplate or grill on and off in a user-selectable duty cycle. The control knob on the simmerstat determines what proportion is spent on, and what off. For example, with the knob turned to a quarter it might use a duty cycle of 5 seconds on then 15 seconds off, thus giving roughly 25 percent of the heating element's full power. For both domestic and professional usage, EGO energy regulators are most often used in electric cookers, but they can also be found in grills, for example. They control the temperature by switching the power on or off again at longer or shorter intervals. The output is continuous at the highest setting. Energy regulators are installed immediately behind the control knob.

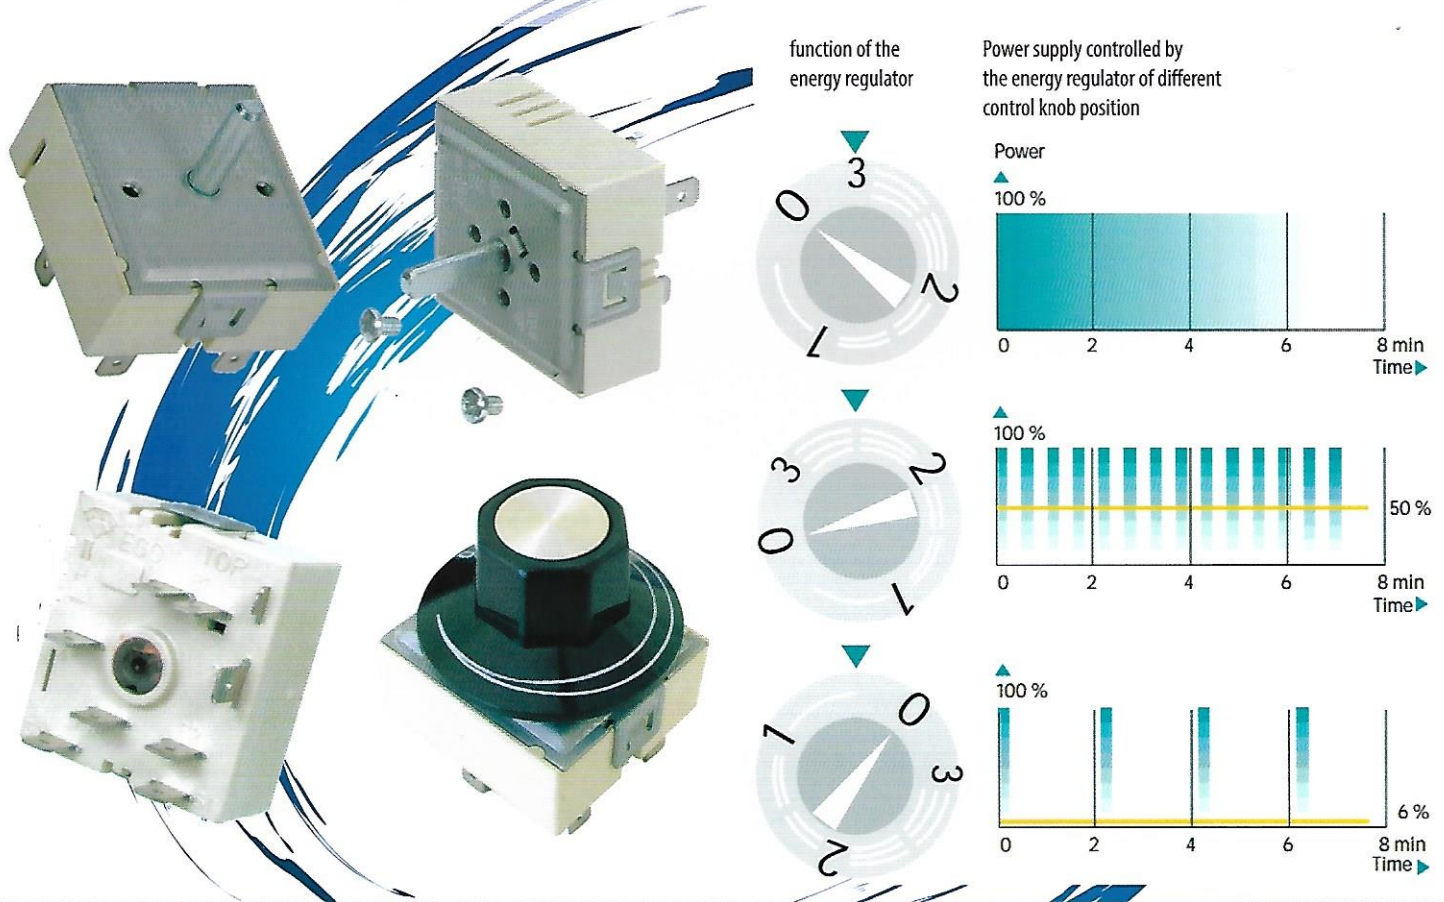

Part Number	Knob Part No #	Voltage	Capacity (A)	Function	Turn Direction	Shaft Diameter	Shaft Length	Mounting Thread
50.57131.131	524.830	120 V	13 A	Single-Circuit	Right	6x4.6 mm	23 mm	M4
50.57011.010	524.830	220 V	13 A	Single-Circuit	Right	6x4.6 mm	23 mm	M4
50.57021.010	524.830	230 V	13 A	Single-Circuit	Right	6x4.6 mm	23 mm	M4
50.57024.060	524.830	230 V	13 A	Single-Circuit	Right	6x4.6 mm	23 mm	M4
50.57071.010	524.830	240 V	13 A	Single-Circuit	Right	6x4.6 mm	23 mm	M4
50.57031.010	524.830	400 V	7 A	Single-Circuit	Right	6x4.6 mm	23 mm	M4

Tel : +971 6 7445801, +971 6 7457808, Fax : +971 6 7445809, Mobile : +971 50 4625156,

P.O. Box : 3076, Ajman, United Arab Emirates,

E-mail : rheat@emirates.net.ae, reliableheaters@hotmail.com, Website: www.rheat.ae